



GDL/4-20 mA DATALOGGER

Industry Standard 4-20 mA

Rugged, portable, compact

Powers two 4-20 mA sensors

FEATURES

- Two 4-20 mA channels
- Over 65,000 records – *non-volatile memory*
- RS485 network – *network with other AquiStar Smart Sensors*
- Wireless connectivity – *radios and/or cellular*
- Rugged control box – *polycarbonate (IP67)*
- Small size – *5.5" x 3.1" x 2.6" (excluding connectors)*
- Internal 12 VDC power supply – *AA alkaline pack runs datalogger and supplies power to 4-20 mA loop*
- External power supplies available – *for more data intensive or long-term datalogging needs*
- Programmable warm-up time – *many 4-20 mA sensors require a warm-up time before readings are stable. Easily set the required warm-up time for your particular equipment.*
- Output in mA, μ A, or User Defined Units – *display your data in PSI, feet of water, or any unit of your choosing*
- Free Aqua4Plus control software
 - Easily calibrate your sensors – *built-in calibration calculator*
 - Set up flexible recording sequences
 - Retrieve data
 - Monitor real time data
 - View collected data – *tables & graphs*
 - Export to spreadsheets and databases with a click of a button




APPLICATIONS

- Stormwater discharge monitoring
- Water quality monitoring
- Irrigation control
- Stream gauging
- Wetland monitoring
- Well, tank, tidal levels

HOW TO ORDER

- Order part number 4N985 - GDL Datalogger / 4-20 mA
- Contact INW sales representative for options

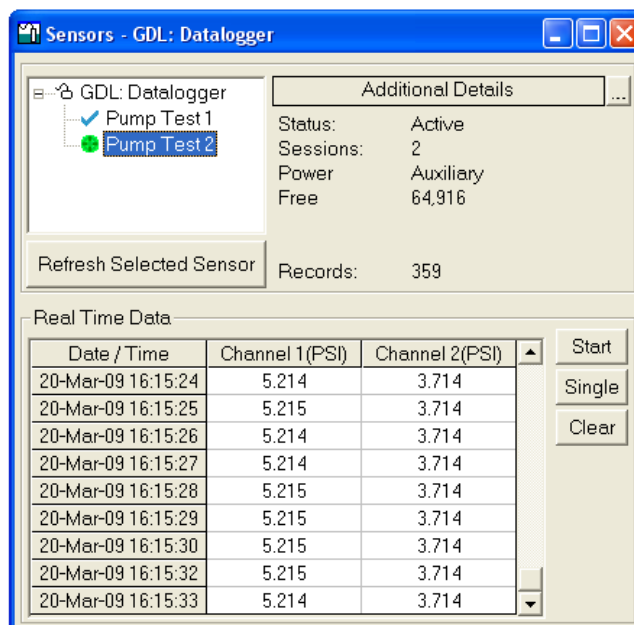

Aqua4Plus Software

Instrumentation Northwest, Inc.



Sales and Service Locations

8902 122nd Ave., Kirkland • Washington 98033 USA

(425) 822-4434 • (425) 822-8384 FAX • info@inwusa.com

4620 Northgate Boulevard, Suite 170 • Sacramento, California 95834

(916) 922-2900 • (916) 648-7766 FAX • inwsw@inwusa.com

1-800-776-9355
<http://www.inwusa.com>